
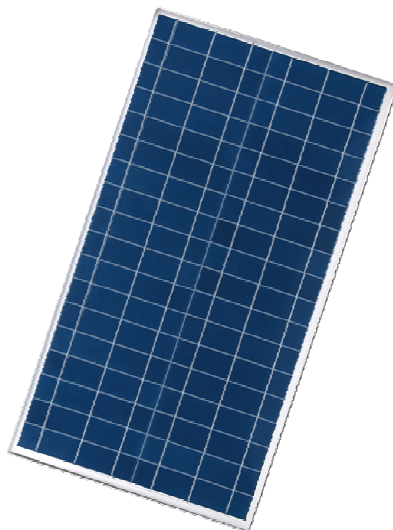


## Specification of 30W18V PV

0.1w to 300w custom solar panel charge most of rechargeable batteries. It is widely used in popular lighting products; portable solar power supply products like mobile phone charger; solar vehicles like solar golf car/boat; water pumps and fountains; homes and Buildings; security alarms, lights and CCTV; consumer electronics; toys, novelty and gift products; agriculture and water; telecommunications; marine; solar power plants; solar home system.

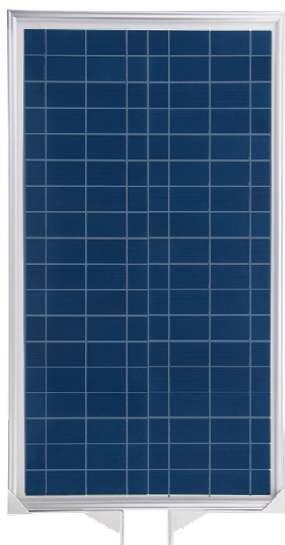

High efficiency America SunPower solar cell **>22.5%**

High efficiency Monocrystalline solar cell **>19%**

ETFE lamination lifespan **>15 years**

PET lamination lifespan **>6 years**

Type of lamination Epoxy, PET, ETFE, Glass

customized size, power, voltage, current

customized shape: circle, triangle, quadrilateral, polygon, any other irregular shape.

TW-SP-30W	30w 18v tempered glass solar panel without frame
Solar cell	Polycrystalline silicon solar cell 156×156mm
No.of cells and connections	36=2×18pcs
Test condition	AM1.5, 1000W/m <sup>2</sup> , 25°C
Error	±2%
Maximum power(P <sub>m</sub> )	30W
Voltage at max power(V <sub>mp</sub> )	18V
Current at max power(I <sub>mp</sub> )	1.65A
Short circuit current(I <sub>sc</sub> )	1.75A
Open circuit voltage(V <sub>oc</sub> )	21.6V
Dimension	650*420*5mm
Weight	2.7KG